

MRseries MR15N

Two-way Loudspeaker System




The **MR15N** is a high precision and high power stage monitor. It offers a “studio monitoring” type of response, exceptional dynamic capability, very low distortion, and has mechanical system for angle adjustment when floor mounted.

MR15N是一款15"同轴两分音全音域监听音箱。采用一只15"强磁同轴单元，90° × 40° 恒指向性号角，箱体采用多层复合夹板，聚脲弹性防水喷涂制作。

FEATURES

- High quality plywood with polyurea waterproof paint
- Neodymium HF driver
- Compact two-way passive system
- Patent 90° × 40° horn

CONFIGURATION

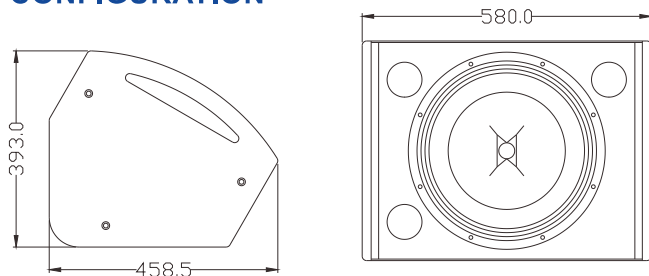

产品特点

- 高质量单元配置，高强度夹板箱体
- 多角度设计适合不同舞台
- 超长品质保证期：品质与信心的保证

适用范围

- 多功能厅、高级酒店会所
- 流动商演、乐队扩声以及舞台返送音箱



FREQUENCY RESPONSE(-3dB)	50 Hz-18kHz
FREQUENCY RESPONSE(-10dB)	45 Hz-20kHz
DRIVERS	1×15"(385mm)/3"voice coil LF 1×1.4"(36mm)/3"voice coil HF
RATED POWER	400W RMS,1600W peak
SENSITIVITY	98dB 1watt/1 metre
MAXIMUM SPL	124dB continuous,130 dB peak
IMPEDANCE	8 ohms nominal
DISPERSION(-6dB)	90° × 40°
CROSSOVER FREQUENCIES	1.5kHz passive
INPUT CONNECTORS	2× Speakon NL4
PACKAGE SIZE	530mm×505mm×685mm
NET WEIGHT	21 kg/pc
GROSS WEIGHT	24 kg/pc